

# DATA SHEET

## High temperature Ceramic plug on cable

- Installation on high temperature electric appliance such as: Oven, Stove, etc.
- Rewireable Plug for multiple use.
- Extremely durable and robust structure. Passed SII's shaking and falling durability tests.
- The Only SII Certified High Temperature Ceramic plug.

**Max operation voltage:** 230VAC

**Max current:** 10A

**Max Temperature:** 220°C

**Poles:** 2P+E (Phase L, Neutral N, Earth PE)

**IP rate:** IP20

**Materials:**

Plug Cover: PBT

Plug Base: PBT

Pins cover: durable ceramic

Cable Holder: Nylon 66

Insert Contacts: Brass (approx. 70% copper)

**Installation:** install on 3 conductors cable.


- Suitable for cables range 3X0.5 mm<sup>2</sup> - 3X2.5 mm<sup>2</sup>.

**Required tools for installation:** Phillips screwdriver and slot screwdriver.

**Safety:** equipped with Cable Holder to prevent disconnection during use.

**Certification:** SII Approval.

**Compatible Countries:** Universal.

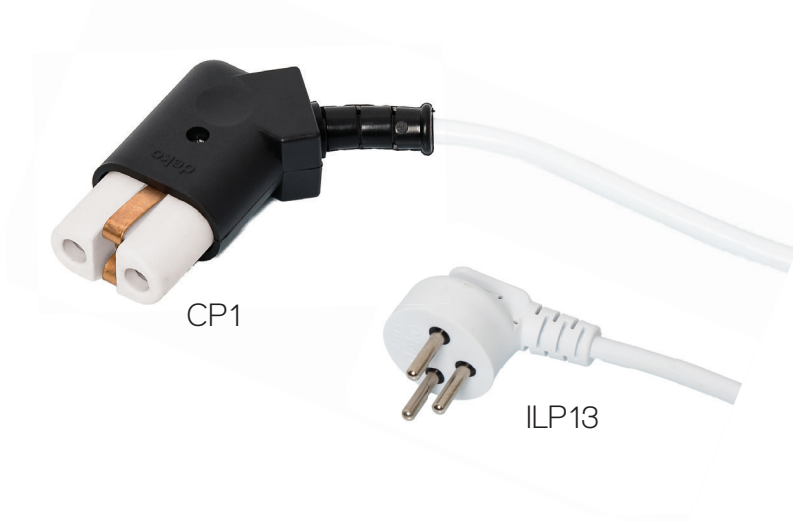

10A

230 VAC

IP20

220°C

**PRODUCTS:**

Catalog No	Model	Model	Max Cable Diameter	Cable	Color cable	Weight	Unit packing	Quantity in carton
DC014002200180	ILP13	CP-1	1.8 mm	HO5VV-F 3X1mm <sup>2</sup>	White	0.3176	Bag	50

**DRAWINGS:** (mm)

