

# DATA SHEET

## Perilex 5-pole angle plug

- This Perilex 5-pole angle plug is suitable for installation on devices that require three-phase electric power such as industrial ovens, bakeries, medical equipment, etc.
- Rewireable Plug for multiple use.
- Comfortable Design enables an easy grip of the plug, and extracting from the socket.

**Max operation voltage:** 400VAC

**Max current:** 16A

**Poles:** 3P+N+E (Phase L1, Phase L2, Phase L3, Neutral N, Earth PE)

**IP rate:** IP20

**Materials:**

Plug Cover: PC Polycarbonate.

Plug Base: PC Polycarbonate.

Cable Holder: St+Zn Plating

Pins: Brass (approx. 70% copper)

**Installation:** install on 5 conductors cable.


- Suitable for cables range 5X0.5 mm<sup>2</sup> - 5X2.5 mm<sup>2</sup>.

**Required tools for installation:** Phillips screwdriver and slot screwdriver.

**Safety:** equipped with Cable Holder to prevent disconnection during use.

**Certification:** KEMA certification according to IEC 60309.

**Compatible Countries:** Universal.

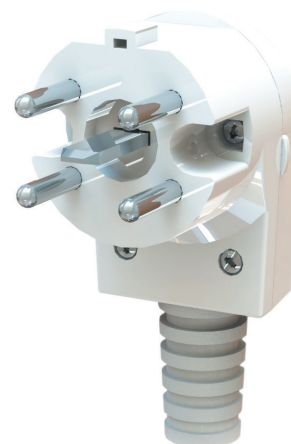

**PRODUCTS:**



Catalog No	Model	Max Cable Diameter	Color	Weight	Unit packing	Quantity in carton
D5P00205PAW	P-9	13 mm	White	0.108	Bag	15

**DRAWINGS:** (mm)

